


SPOTLEDCod. **SPAA240340****Introduction**


SPOTLED series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body. False ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux 300 lm. Symmetrical and Asymmetrical optics included.

N.2 rechargeable LiFePO₄ batteries @ 1.5 Ah included; charging time 12 H; autonomy 3 H. Function/Malfunction signalling LEDs. Protection rating IP40, double insulated, operating temperature 0 °C ÷ 40 °C.

Description

Product series	SPOTLED
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Module dimensions	230 x 65 x 26 mm
Spotlight diameter	90 mm

A = mm 230
B = mm 240,2
C = mm 65
D = mm 26
F = Ø 90
E = Ø 74

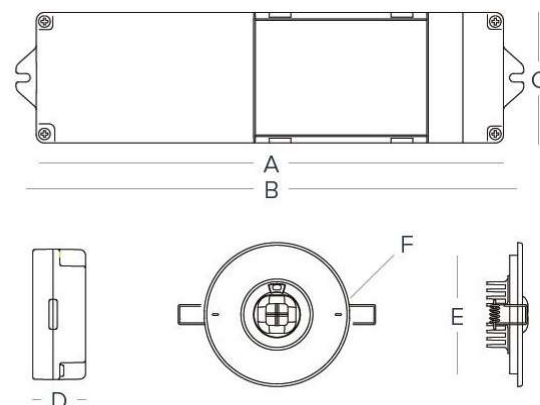
**Technical specifications**

Installation	False ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	6.0 W
Max absorbed power in VA	9.2 VA
Batteries	N.2 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	3 H
Total charging time	12 H

Driver Body	White Polycarbonate RAL9003
Spotlight Frame	White Polycarbonate RAL9003
Glow wire	850 °C
IP Protection rating	IP40
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547 EN 55015, EN 61000-3-2, EN 61000-3-3 EN 61347-1, EN 61347-2-7, EN 62034

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	300 lm
Lum. flux in Maintained mode	220 lm

Symmetrical optics

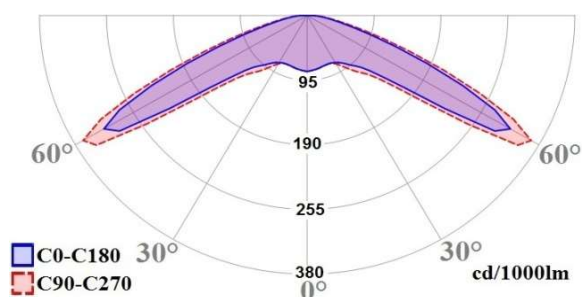

Asymmetrical optics

