

POLYCARBONATE
PROTECTION




Ideal Our Outdoor Installations with Optional Gaskets

OUTDOOR PURPOSES

FIRE SAFE

MODEL NO : FS-4000-PC-WP

 **WEATHEPROOF MCP COVER WITH 7 GASKETS**

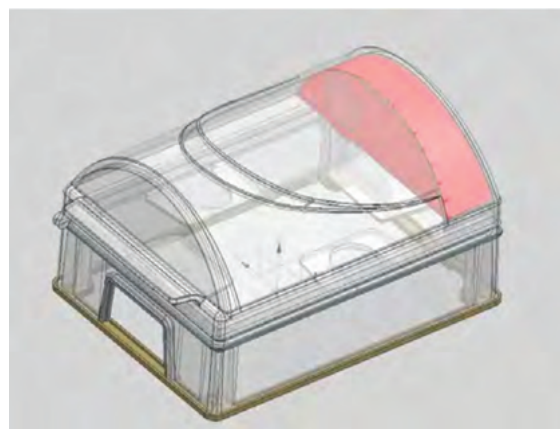

KEY FEATURES

General Information

- These indoor and outdoor low profile or dome polycarbonate protections can guard an assortment of devices without confining important operation.
- A three-year assurance against breakage of polycarbonate in regular use (one year on electromechanical and electronic components), is also available.

Design

- Averts false alarms, without obstructing legitimate operations of a manual call point in case of an emergency.

Construction

- Tough polycarbonate housing can withstand severest of hits.

Installation

- A simple 4 fixing installation can retrofit over present device.
- Can accommodate flush or outward mount applications.
- Typical working properties of polycarbonate are -40° to 121°C (-40° to 250°F).

Electronics


- Optional Available with or without a 96 dB integral sounder, powered by a 9V PP3 battery. The sounder draws instant consideration to the zone.
- Optional 12-24 VDC powered units.

Options

- Optional break seals are accessible for supplementary security.
- Existing in a choice of colours (like red, green, blue etc...)
- Personalised labelling available.



Optional Multiple Gaskets upto 7 no.'s for Outdoor Installation

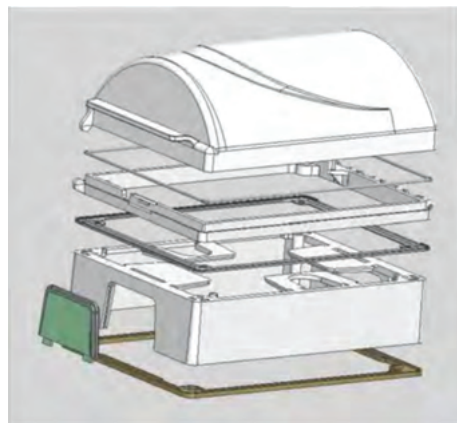

PRODUCT OVERVIEW

These indoor and outdoor low profile or dome polycarbonate covers (self-supported structures) shield devices such as manual call points, emergency buttons and dual action pull stations etc., without limiting legitimate action. The multipurpose cover offers outstanding safety against physical impairment (both unplanned and deliberate), dust and stain as well as severe environments inside and out.

IMPORTANT NOTICE

When used on fire systems, Universal Stopper is useful for areas where the incidence of false fire alarms from manual call points is possible or has proven to be a serious problem. Any drawback of the device is more than balanced when one considers the consequences of false fire alarms, especially if fire service workers and equipment are responding to a false fire alarm when they are needed for a real fire somewhere else. This adds disruption to the facility due to false fire alarms occurrences. If you have, or may have, a problem with false fire alarms or physical/weather impairment to your fire alarm activation devices, the Universal Stopper is most suitable and invaluable.

FIRE SAFE Universal Stopper

Dimensions and Technical Information

BUILD YOUR OWN MODEL

FS-4000

Cover Options:

3 = Dome cover

Mounting Options:

0 = Flush Mount (Open backed) -

1 = Surface Mount - Clear Spacer (Dual Mount - Open backed) -

Hood/Horn Options:

00 = No Label hood

10 = Label hood without sounder ★

20 = Label hood with sounder ★

30 = Label hood with sounder and relay ★

★ All colours except NC

Housing/Sounder Colour & Label Options:

FR (red) - IN CASE OF FIRE - LIFT COVER / ACTIVATE FIRE ALARM

FR-BREAK (red) - IN CASE OF FIRE - LIFT COVER / BREAK GLASS

FR-PULL (red) - IN CASE OF FIRE - LIFT COVER / PULL FIRE ALARM

EG (green) - IN CASE OF EMERGENCY - LIFT COVER / BREAK GLASS TO OPEN DOOR

No Label

NB = Blue

NC = Clear

NG = Green

NR = Red

NW = White

NY = Yellow

Custom Label

CB = Blue

CG = Green

CR = Red

CW = White

CY = Yellow

For custom label option, must provide wording (2 lines, 30 characters per line including spaces limit)

Language Options:



-KA KANNADA

-TA TAMIL;

-ES Spanish

-HI HINDI

No additional coding is required for an English label

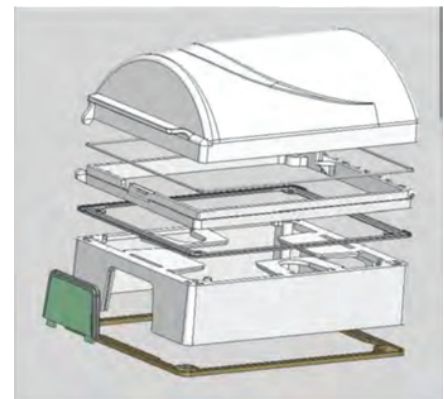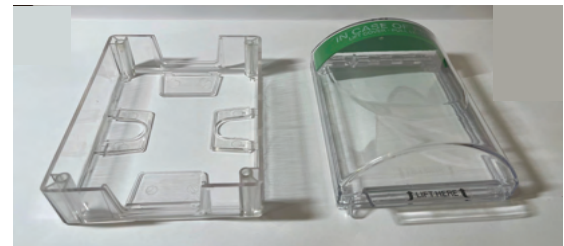

MODELS AVAILABLE

FS-4000-PC-TP TOP PART -RECESSED FITTING : Universal Stopper, (flush mounted, dome cover)

FS-4000-PC-SF SURFACE MOUNT : Universal Stopper, (flush mounted, dome cover with back spacer)

FS-4000-PC-SF-WP: Universal Stopper, (flush mounted, dome cover with back spacer AND **WEATHRRPROOF GASKETS**


optional; : Alarm MODULE

EXTERNAL DIMENSIONS (mm):


Mounting Option	Height	Width	Depth
Flush	207	137	68
Surface	207	137	105




DIMENSIONS:

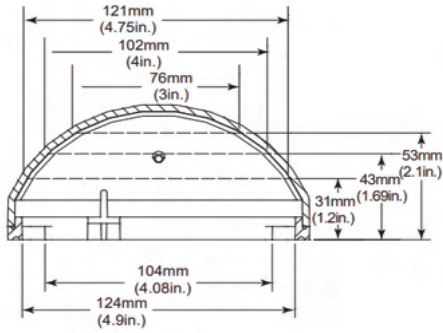




Flush Mount

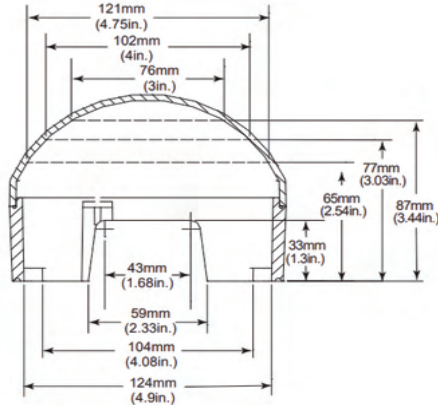

Surface Mount

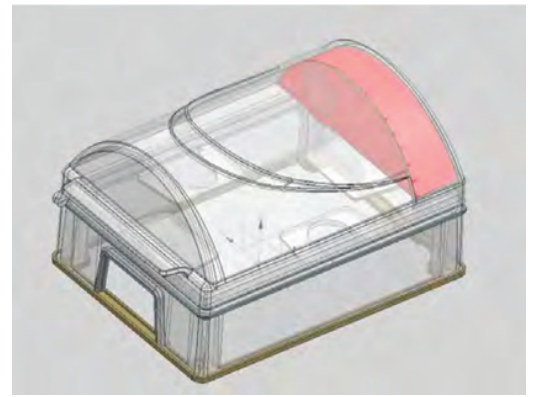


OPTIONAL GASKETS

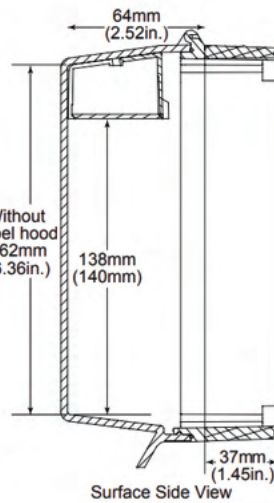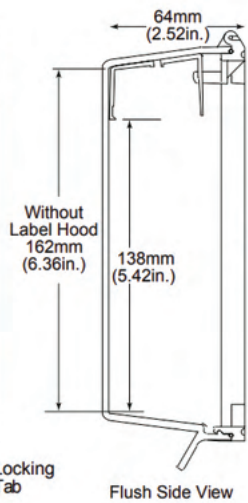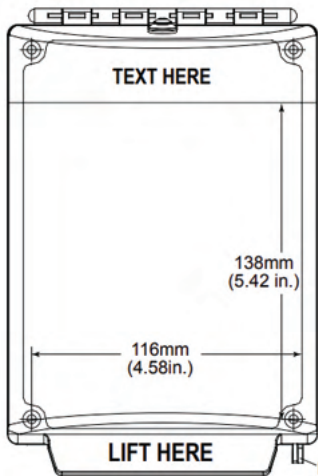

Flush Side View

Surface Side View

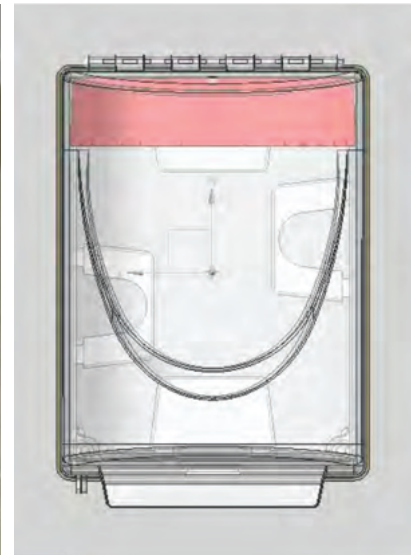

back) with sounder, with emergency exit label
**PLEASE REFER TO BUILD YOUR OWN MODEL TO GENERATE
 OVER 500 VARIATIONS OF THIS PRODUCT**

ACCESSORIES:

- | | |
|-----------------|----------------------------|
| FS -4000-SPACER | 37mm Spacer |
| FS -PIN | Servicing Pin |
| FS -Alarm | Sounder Unit |
| BS | Break Seals (Quantity. 10) |

Replacement Housing Shell (Red)
 Add -G for Green, -B for Blue, -Y for Yellow,



