

FIRE SAFE HORN / STROBE DAMAGE STOPPERS

FS-HS-DS-7000-PC DOME TYPE SERIES



FS-HS-DS-7135-PC SURFACE MOUNT

FS-HS-DS-7125-PC FLUSH MOUNT

PRODUCT OVERVIEW

These virtually indestructible covers (**Solid for strobe-only alarms**) are designed to stop vandalism and accidental damage. Molded of clear, thick, UV-stabilized polycarbonate material, they are backed by a three year guarantee against breakage in normal use. Slots in the **FS-HS-DS-7125** , **FS-HS-DS 7135-PC** & **FS-HS-DS 7135-PC-WP** are solid (**without holes for strobe only**) Many tough, clear spacers are available for larger strobe/horn units, retrofits, surface-mount and weather resistant applications. For the FS-HS-DS-8135 series, Spacer E has an open back for retrofit applications. **Spacer D accommodates deeper units and applications with exposed conduit electrical connections.** Spacer E has an open back frame for flush-mount applications. WEATHER PROOF Kits WITH GASKETS are available for extreme conditions where dampness or water is present.

**FS-HS-DS-7135-PC SURFACE
MOUNT WITH CONDUIT HOLES**

**FS-HS-DS-7135-WP WEATHER-PROOF
SERIES ALSO AVAILABLE WITH- GASKETS**

KEY FEATURES

General Information

- Helps prevent accidental and intentional damage or vandalism.
- See chart for light and sound loss information.
- Easy access for service.
- Three year guarantee against breakage of polycarbonate in normal use.

Design

- Various back box and spacer depths are available to accommodate special applications. **Construction**
- Covers are UV-stabilized.
- Typical working properties of polycarbonate are -40° to 250°F (-40° to 121°C).


Options

- Enviro Kit available for harsh conditions.


Use of horn/strobe cover on audible device decreases the sound output by 6dB(A).

SPACER DESCRIPTION _____



- D Open back box with conduit knockout
- E Open back box for flush mount




D SPACER



E SPACER

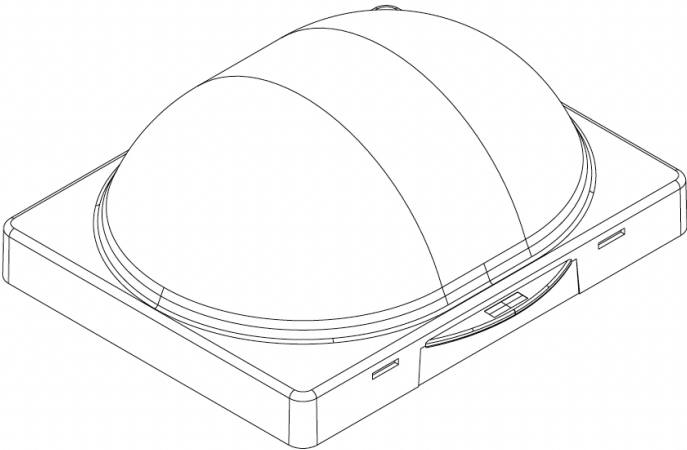

FS-8000 FLAT TYPE SERIES



FS-7000 DOME SERIES

FS-8135	Series Horn/Strobe Covers			FS-7000	Series Strobe Covers		
	H	W	D		H	W	D
D	(232mm)	(182mm)	(156mm)	(232mm)	(182mm)	(146mm)	
E	(232mm)	(182mm)	(110mm)	(232mm)	(182mm)	(102mm)	


FIRE SAFE Horn/Strobe Damage Stoppers

Stopper for Strobe


FS-HS-DS-7125-PC flush mount OPEN BACK BOX

FS-HS-DS-7135-PC SURFACE mount OPEN BACK BOX


FS-HS-DS-7135-PC-WP SURFACE mount OPEN BACK BOX WITH GASKETS FOR WEATHEROOOF



FS-HS-DS-7125-PC



FS-HS-DS-7135-PC




FS-HS-DS-7135-PC


FIRE SAFE Horn/Strobe Damage Stoppers

Dimensions and Technical Information


BACK GASKET

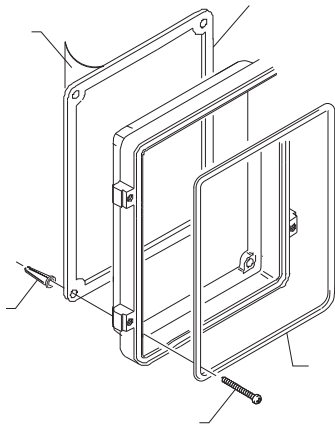

MIDDLE GASKET

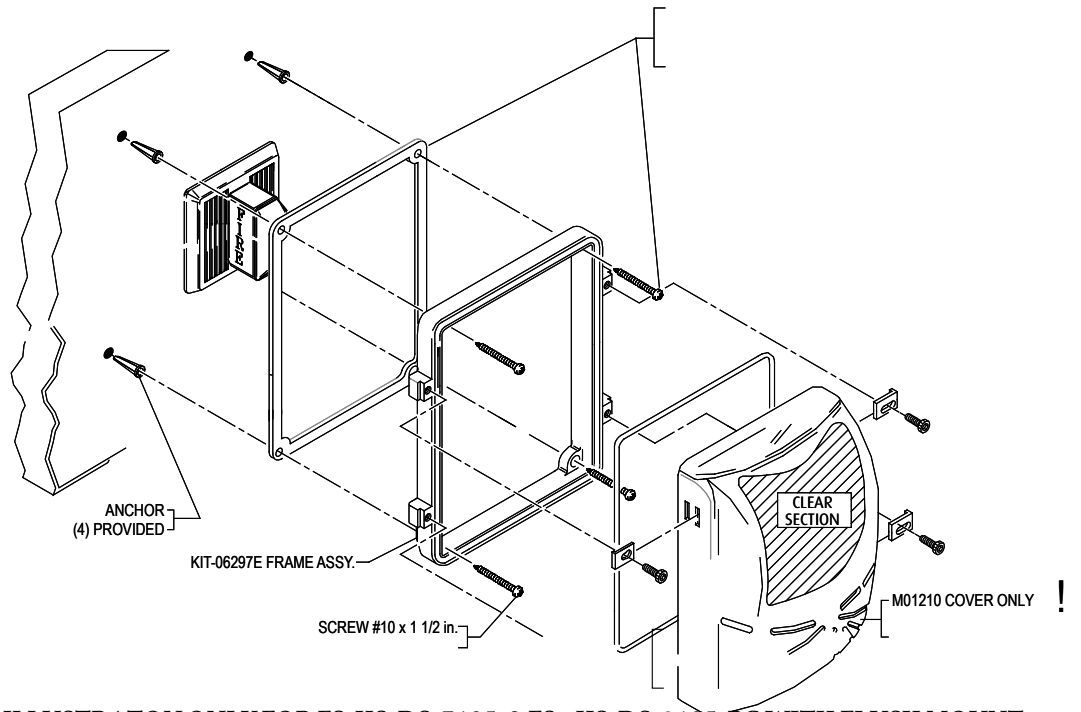

**ILLUSTRATON ONLY FOR FS-HS-DS-7125 & FS--HS-DS-8125-PC WITH FLUSH MOUNT
SPACER (E)**

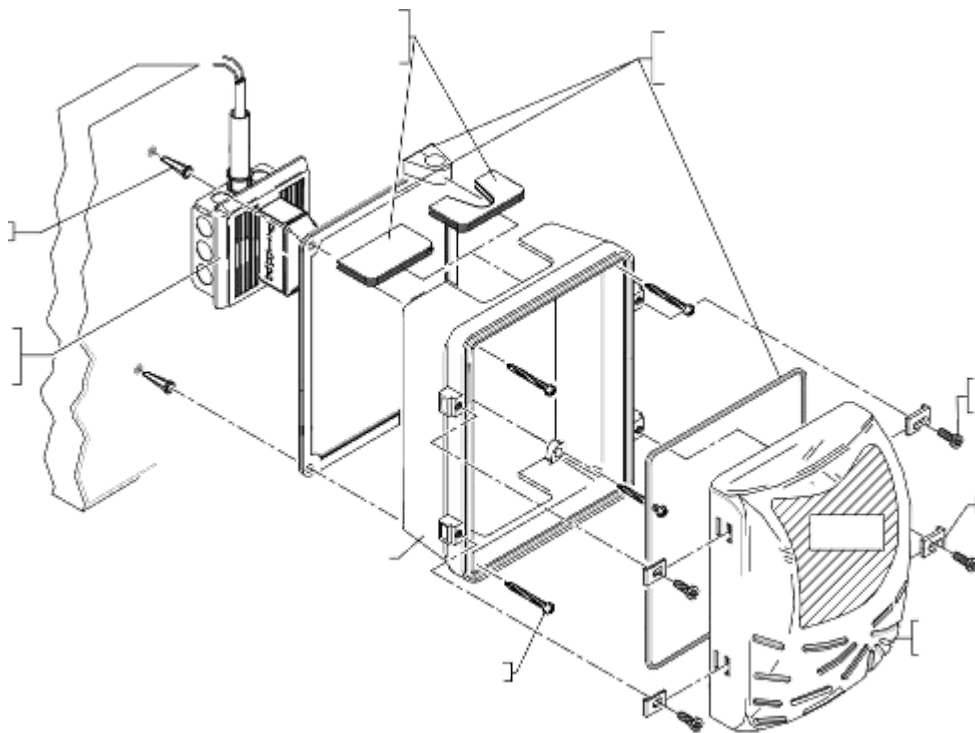

ILLUSTRATON ONLY FOR FS-HS-DS-7135 & FS-HS-DS-8135-PC WITH SURFACE MOUNT SPACER (D)