

FIRE SAFE HORN / STROBE DAMAGE STOPPERS

FS-HS-DS-8000-PC FLAT TYPE SERIES



FS-HS-DS-8125-PC FLUSH MOUNT



FS-HS-DS-8135-PC SURFACE MOUNT



FS-HS-DS-8135-PC SURFACE MOUNT
WITH CONDUIT HOLES

**FS-HS-DS-8135-WP
WEATHER-PROOF SERIES ALSO
AVAILABLE WITH GASKETS**

PRODUCT OVERVIEW

These virtually indestructible covers (Slotted Holes for horn or speaker units & Strobe) are designed to stop vandalism and accidental damage.

Molded of clear, thick, UV-stabilized polycarbonate material, they are backed by a three year guarantee against breakage in normal use. Slots in the **FS-HS-DS-8125**, **FS-HS-DS 8135-PC** & **FS-HS-DS 8135-PC-WP** allow the horn to be heard.

Many tough, clear spacers are available for larger strobe/horn units, retrofits, surface-mount and weather resistant applications. For the FS-HS-DS-8135 series, Spacer E has an open back for retrofit applications. **Spacer D accommodates deeper units and applications with exposed conduit electrical connections.** Spacer E has an open back frame for flush-mount applications. **WEATHER PROOF Kits WITH GASKETS** are available for extreme conditions where dampness or water is present.

KEY FEATURES

General Information

- Helps prevent accidental and intentional damage or vandalism.
- See chart for light and sound loss information.
- Easy access for service.
- Three year guarantee against breakage of polycarbonate in normal use.

Design

- Various back box and spacer depths are available to accommodate special applications. **Construction**
- Covers are UV-stabilized.
- Typical working properties of polycarbonate are -40° to 250°F (-40° to 121°C).


Options

- Enviro Kit available for harsh conditions.


Use of horn/strobe cover on audible device decreases the sound output by 6dB(A).

SPACER DESCRIPTION _____


- D Open back box with conduit knockout
- E Open back box for flush mount




D SPACER



E SPACER




FS-8000 FLAT TYPE SERIES



FS-7000 DOME SERIES

FS-8135	Series Horn/Strobe Covers			FS-7000 Series Strobe Covers		
	H	W	D	H	W	D
D	(232mm)	(182mm)	(156mm)	(232mm)	(182mm)	(146mm)
E	(232mm)	(182mm)	(110mm)	(232mm)	(182mm)	(102mm)

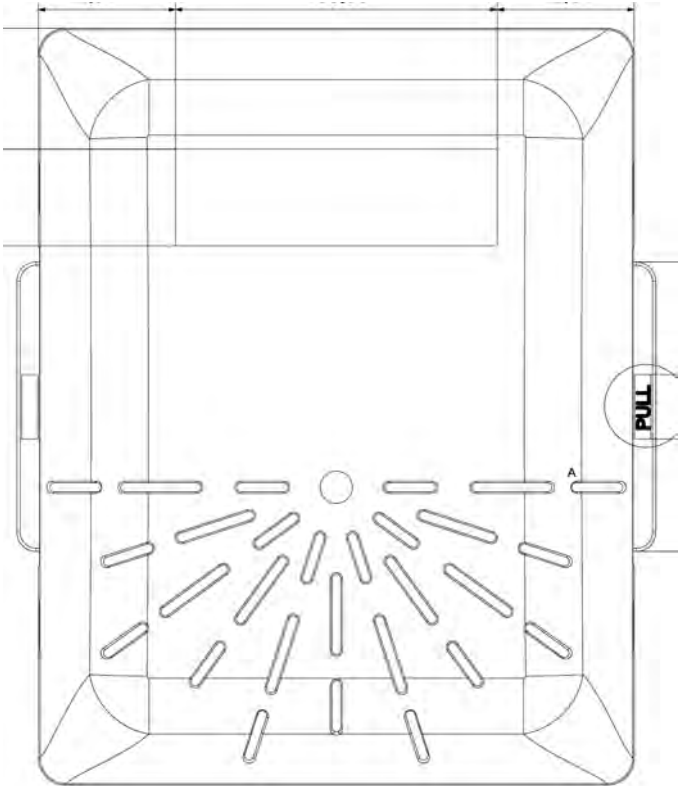


FIRE SAFE Horn/Strobe Damage Stoppers

Stopper for Horn/Speaker/Strobe


FS-HS-DS-8125-PC flush mount OPEN BACK BOX

FS-HS-DS-8125-PC SURFACE mount OPEN BACK BOX


FS-HS-DS-8125-OC-QP SURFACE mount OPEN BACK BOX WITH GASKETS FOR WEATHEROOOF



FS-HS-DS-7125-PC



FS-HS-DS-7125-PC




FS-HS-DS-7135-PC

FIRE SAFE Horn/Strobe Damage Stoppers

Dimensions and Technical Information

BACK GASKET

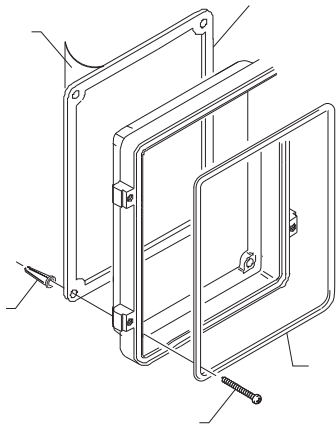

MIDDLE
GASKET

